

Double check valve

to EN13959:2004, type E D, compression ends

SIZES (mm)

Compression connections EN 1254-2

Range	15	22	28
Code DZR	BR 68	BR 69	BR 70
Code DZR CP	BR 90		

DIMENSIONS (mm)

Range	15	22	28
A	70	97	109
B	25	32	39
Weight kg	0.18	0.23	0.49

VALVE SUITABILITY

Steam	Water	Oil	Air	Gas Inert	Gas Combustible	Gas Corrosive	Gas Oxygen
✗	✓	✗	✗	✗	✗	✗	✗

MATERIAL SPECIFICATION

Component	
Body	DZR Brass
Test Screw	DZR Brass
Non Return Valves	Nylon
Compression Nut	Brass
Compression Olive	Brass

PRESSURE EQUIPMENT DIRECTIVE CATEGORY


Sizes

15	22	28
SEP	SEP	SEP

MAXIMUM PRESSURE CONDITIONS

Size	Maximum Pressure Conditions (bar)	
	(Cold working) Temperatures up to -10°C	(Hot working) Temperatures up to 65°C
15-28	10	10
Size	Maximum Pressure Conditions (psi)	
	Temperatures up to -10°C	Temperatures up to 65°C
15-28	145	145

Temperature range - 10°C + 150°C (non shock)

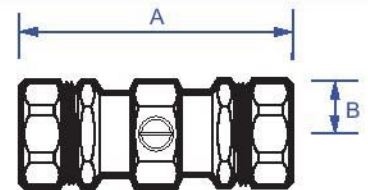

PRESSURE & TEMPERATURE RATINGS

